

DaySequerra


FIRMWARE UPDATE TUTORIAL

The firmware update process takes about five minutes to complete. During this time, no other tasks should be performed.

A network connection or crossover cables is required for this feature. Crossover cables may be used when a Network connection is not available. Power ON the M4.2S and open a web browser. Type the IP address of the M4.2S in the URL to open the WebServer. Two tabs are displayed at the top of the WebServer – Tuner and Settings. Click on the “**Settings**” Tab.



Once in the Settings Tab, select – ‘**Check for Update**’ when selected will search for a more recent version of firmware if available on DaySequerra’s FTP site. A pop-up window will tell the user if the Firmware is current or an update is available. (See figure below).

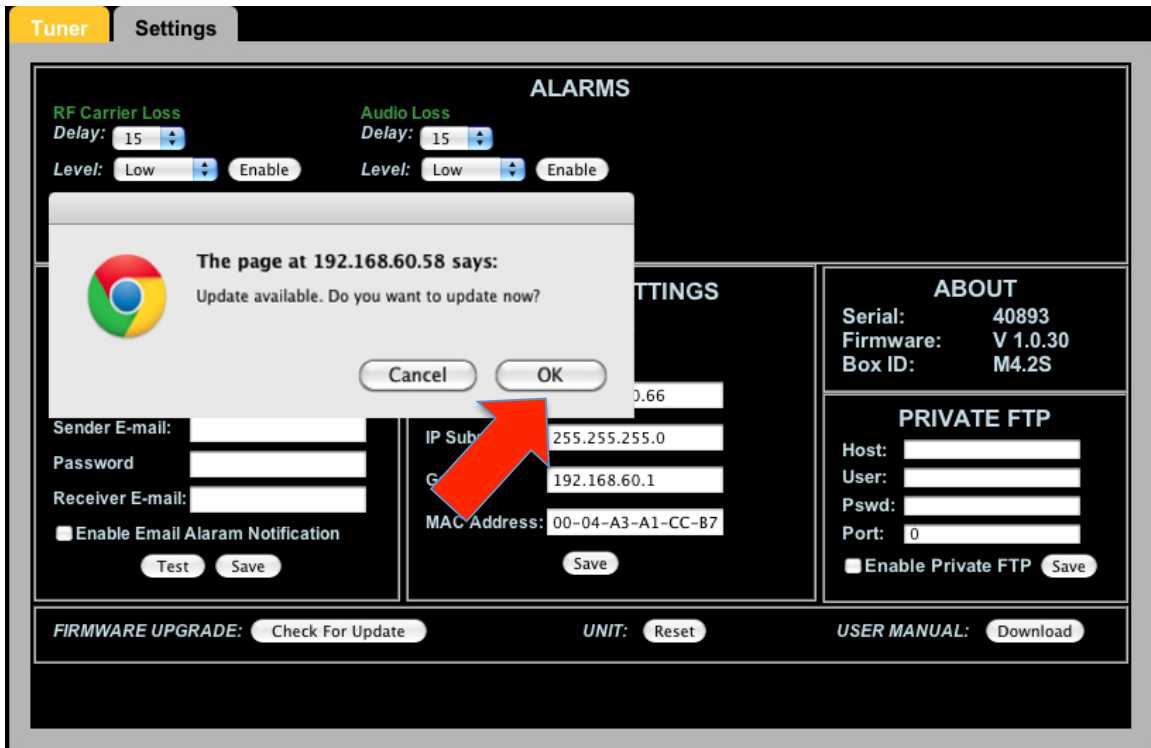

If an update is available, click “**OK**”. The firmware will be automatically downloaded. Once the download is complete the M4.2S will automatically power cycle to complete the update. Refreshing the web browser is recommended after an update. The new version of Firmware will be displayed in the ‘**ABOUT**’ window of the Settings tab and also in the About menu of the M4.2S Box User Interface. At this time ‘Firmware Upgrade’ does not automatically check for updates so it is recommended to manually check periodically. A reset button performs a soft reboot of the M4.2S. The most recent version of the M4.2S user manual is available at all times by clicking ‘Download’.